
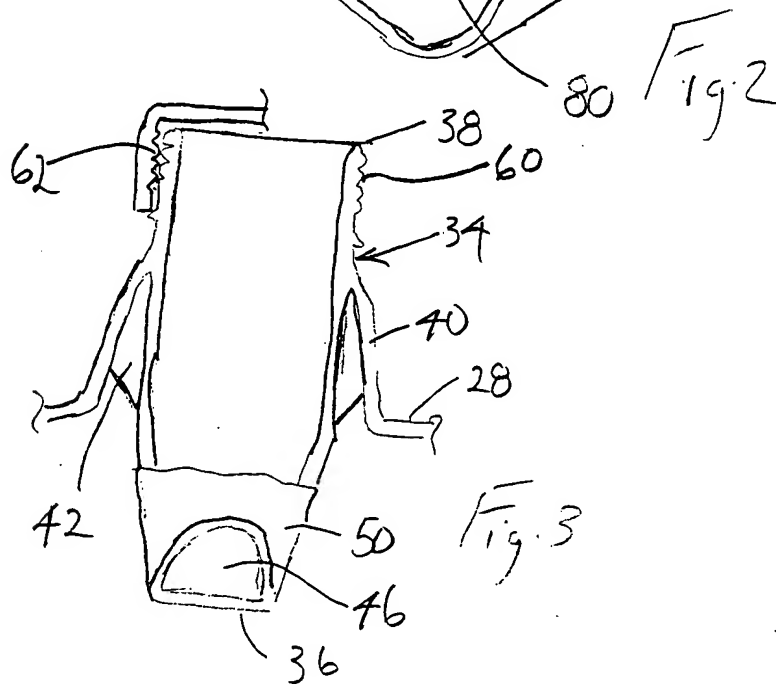


This diagram shows an exploded perspective view of a mechanical assembly. The main component is a housing (20) with a central opening (150) and a flange (144). A cap (23) is shown above the housing, with a gasket (160) between them. A bracket (26) is shown to the left, with a pin (28) and a nut (38) used to secure it. A flange (147) is shown below the housing, with a gasket (147) between them. A flange (22) is shown below the housing, with a gasket (24) between them. A flange (30) is shown below the housing, with a gasket (32) between them. A flange (34) is shown below the housing, with a gasket (36) between them.

Fig. 1

10076612.021902

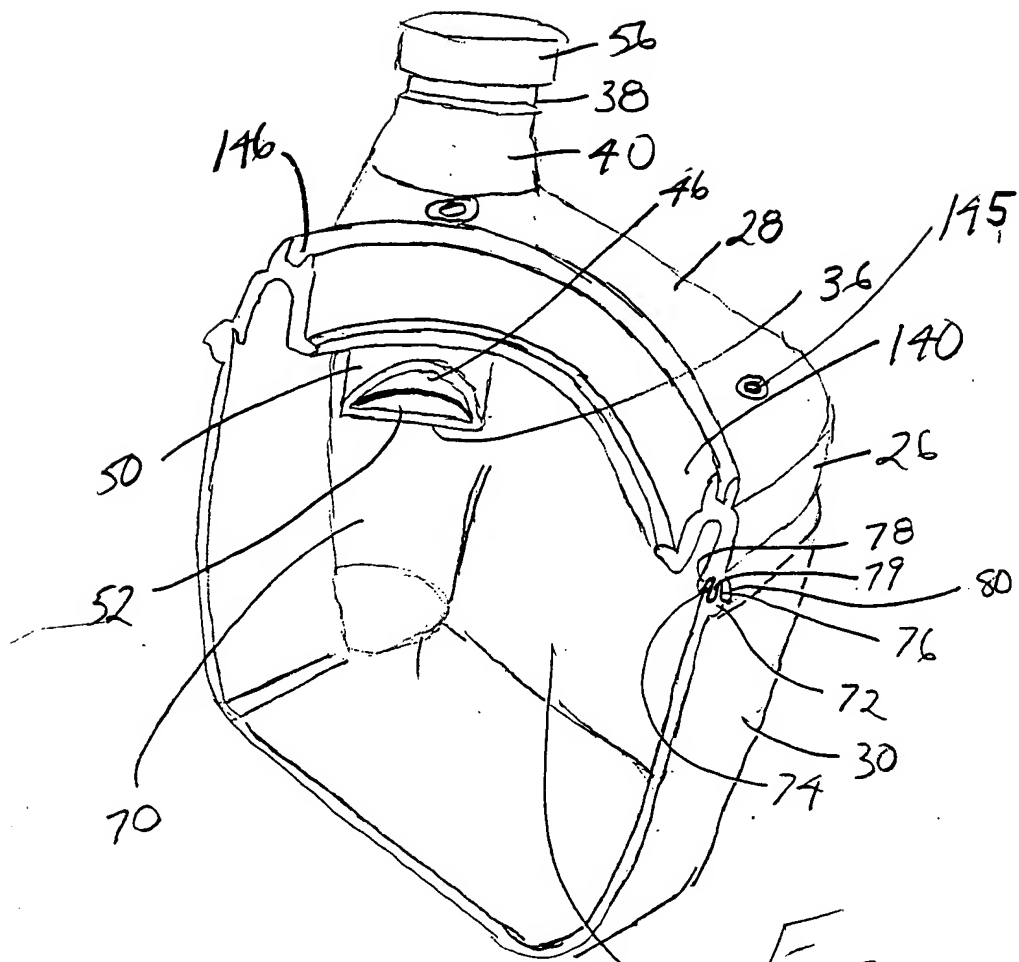

10076612.021902

